REQUIRED MATERIALS:



•2 People



Wood Board (scrap)



Sawhorse or Support Table

Garden Hose or Sand



• (2 each) Wrenches and/or Socket Wrenches and Sockets.



AND/OR







OPTIONAL TOOLS AND MATERIALS:




• Large and Small Adjustable Wrenches

HUFFYSPORTS

A DIVISION OF RUSSELL CORPORATION

Portable System Owners Manual

Customer Service Center
• N53 W24700 South Corporate Circle • Sussex, WI 53089 • U.S.A.

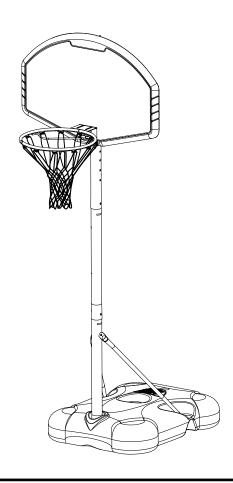



AWARNING!

READ AND UNDERSTAND OPERATOR'S MANUAL BEFORE USING THIS UNIT.

FAILURE TO FOLLOW OPERATING INSTRUCTIONS COULD RESULT IN INJURY OR DAMAGE TO PROPERTY.

Write Model Number From Box Here:


Toll-Free Customer Service Number for U.S: 1-800-558-5234,

For Canada: 1-800-284-8339,

For Europe: 00 800 555 85234 (Sweden: 009 555 85234),

For Australia: 1-800-632 7921

Internet Address: http://www.huffysports.com

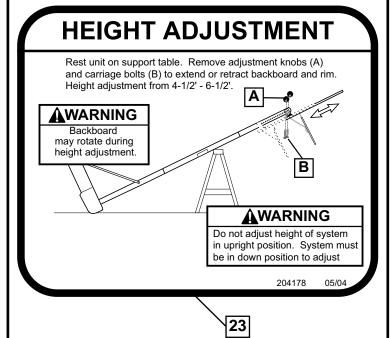

AWARNING

FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

Owner must ensure that all players know and follow these rules for safe operation of the system.

- DO NOT HANG on the rim or any part of the system including backboard, support braces or net.
- During play, especially when performing dunk type activities, keep player's face away from the backboard, rim and net. Serious injury could occur if teeth/face come in contact with backboard, rim or net.
- Do not slide, climb, shake or play on base and/or pole.
- After assembly is complete, fill system completely with water or sand. Never leave system in an upright position without filling base with weight, as system may tip over causing injuries.
- When adjusting height or moving system, keep hands and fingers away from moving parts.
- · Do not allow children to move or adjust system.
- During play, do not wear jewelry (rings, watches, necklaces, etc.). Objects may entangle in net.
- Surface beneath the base must be smooth and free of gravel or other sharp objects. Punctures cause leakage and could cause system to tip over.
- Keep organic material away from pole base. Grass, litter, etc. could cause corrosion and/or deterioration.
- Check pole system for signs of corrosion (rust, pitting, chipping) and repaint with exterior enamel paint. If rust has penetrated through the steel anywhere, replace pole immediately.
- Check system before each use for proper ballast, loose hardware, excessive wear and signs of corrosion and repair before use.
- Check system before each use for instability.
- Do not use system during windy and/or severe weather conditions; system may tip over. Place system in the storage position and/or in an area protected from the wind and free from personal property and/or overhead wires.
- · Never play on damaged equipment.
- See instruction manual for proper installation and maintenance.
- When moving system, use caution to keep mechanism from shifting.
- · Keep pole top covered with cap at all times.
- Do not allow water in tank to freeze. During sub-freezing weather add non-toxic antifreeze, sand or empty tank completely and store. (Do not use salt.)
- Use extreme caution if placing system on sloped surface.
 System may tip over more easily.

HUFFYSPORTS

In the U.S.:1-800-558-5234 and Canada: 1-800-284-8339 For Europe: 00 055 85234 (Sweden: 009 555 85234).

For Australia: 1-800-632 792

203782 07/04

ID# M580001 05/05



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE SAFETY INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

Owner must ensure that all players know and follow these rules for safe operation of the system.

To ensure safety, do not attempt to assemble this system without following the instructions carefully. Proper and complete assembly, use, and supervision are essential for proper operation and to reduce the risk of accident or injury. A high probability of serious injury exists if this system is not installed, maintained, and operated properly.

- If using a ladder during assembly, use extreme caution.
- Check base regularly for leakage. Slow leaks could cause the system to tip over unexpectedly
- Seat the pole sections properly (if applicable). Failure to do so could allow the pole sections to separate during play and/or during transport of the system.
- Climate, corrosion or misuse could result in system failure.
- If technical assistance is required, contact Huffy Sports.
- Minimum operational height is 6'-6" (1.98m) to the bottom of backboard.

Most injuries are caused by misuse and/or not following instructions.

Use caution when using this unit.


NOTICE TO ASSEMBLERS

ALL Huffy Sports basketball systems, including those used for DISPLAYS, MUST be assembled and ballasted with sand or water according to instructions. Failure to follow instructions could result in SERIOUS INJURY. It is NOT acceptable to devise a makeshift weight system.

IMPORTANT!

Remove all contents from boxes.

Be sure to check inside pole sections;
hardware and additional parts are packed inside.

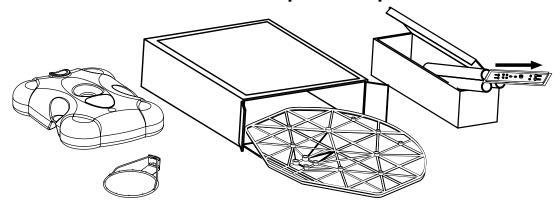





WARRANTY CARD:

Please remember to complete your product registration form either on-line at:

www.huffysports.com/warrantycard or mail-in the enclosed postcard.

Get to know the basic parts of your basketball system...

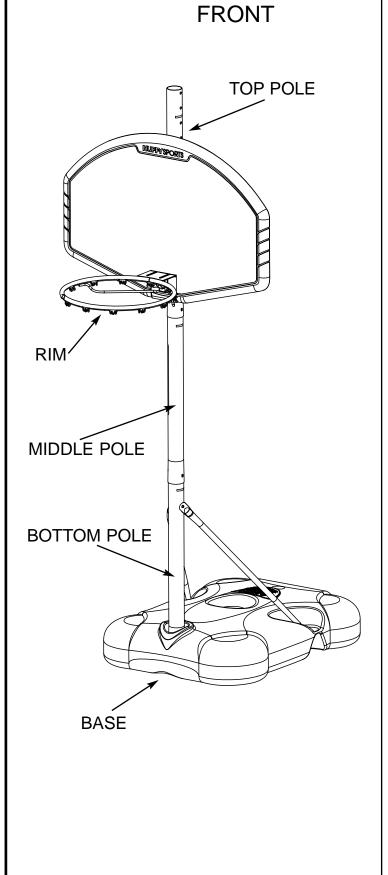

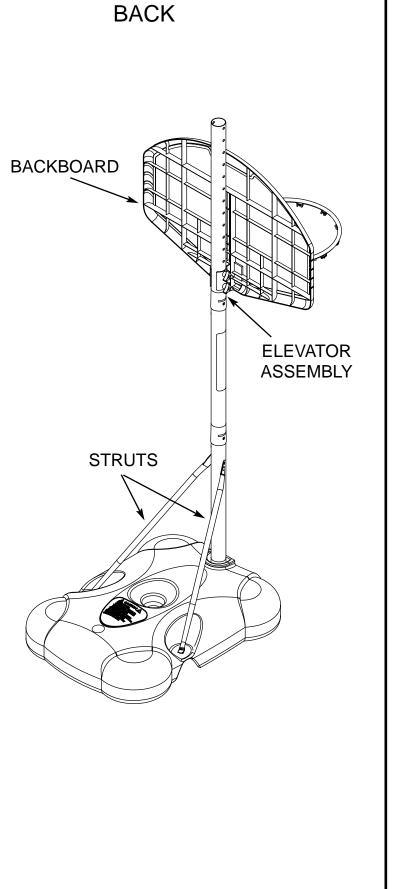

4


PARTS LIST

<u>Silver</u>


Ø	<u>Item</u>	<u>Qty.</u>	Part No.	<u>Description</u>
	1	1	20664903	Tank (Black)
	2	1	918130	Top Pole Section
	3	1	918133	Middle Pole Section with Label
	4	1	918132	Bottom Pole Section
	5	1	203099	Nut, Ny-Lock, 5/16-18
	6	1		Net
	7	1	20378701	Cap, Pole
	8	3	203223	Bolt, Carriage, 5/16-18 x 1" Long
	9	1	203617	Cap, Tank
	10	1	203740	Bolt, Hex, 5/16-18 x 2.63" Long
	11	2	201344	Knob, Plastic, 3-sided
	12	1		Rim
	13	1		Backboard
	14	1	908134	Backboard Mounting Bracket
	15	1	908129	Rim Bracket
	16	2	203739	Bolt, Carriage 5/16-18 x 3.25" Long
	17	4	203218	Washer, Flat, 5/16
	18	1	203309	Washer, Flat, 1.0" O.D.
	19	1	203679	Bolt, Hex, 3/8-16 x 2" Long
	20	3	203100	Nut, Flange, 5/16-18
	21	1	910454	Strut, Left
	22	1	910255	Strut, Right
	23	1	204178	Label, Height Adjustment

^{*} You may have extra parts with this model.

05/05 ID# M580001

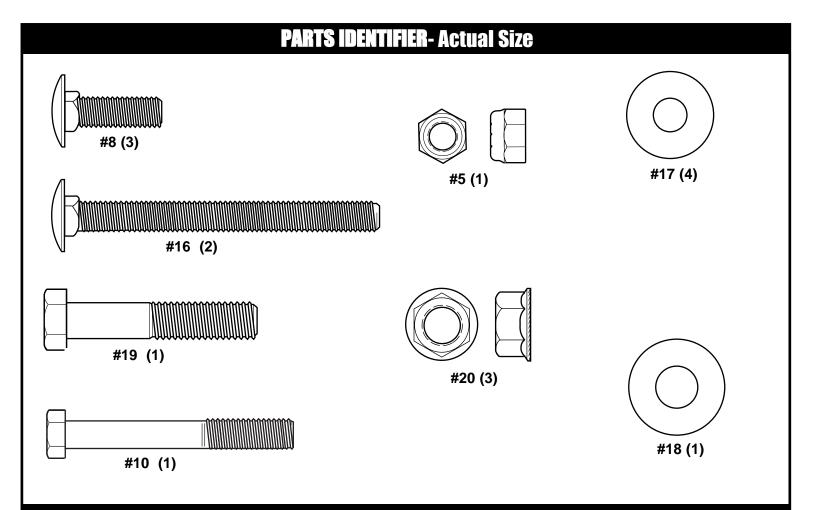


PARTS IDENTIFIER- Not Actual Size

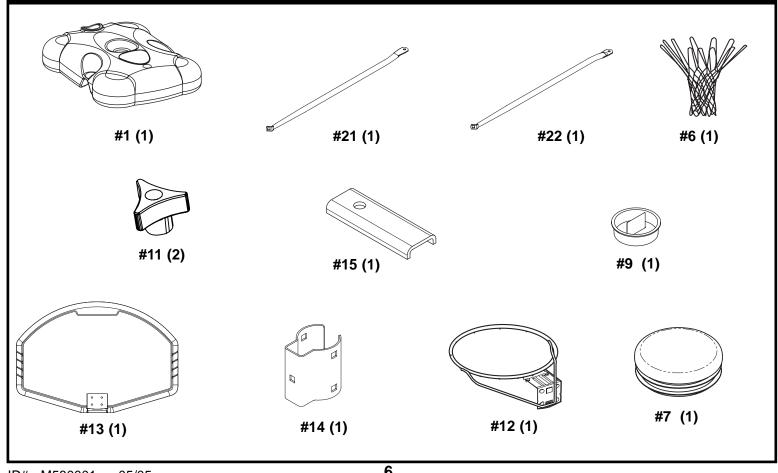

SECTION A: ASSEMBLE THE POLES

Correctly identify each pole section. Poles have an identification sticker that will be used as a reference point in the next step.

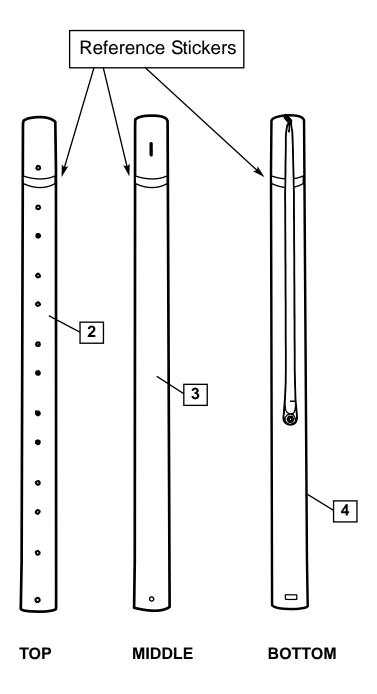

7

05/05 ID# M580001

IMPORTANT!


ONCE POLE SECTIONS ARE POUNDED TOGETHER- THEY CANNOT BE TAKEN APART


Align poles using **alignment marks**. First, pound top and middle poles together by bouncing them on a scrap piece of wood on the ground as shown in **FIG A**. until they no longer move toward pole identification stickers. **THEN** add bottom pole section and pound together in the same way.

A CAUTION!




THE IDENTIFICATION STICKER IS LOCATED 3-3/4" FROM THE END OF THE POLE. WHEN PROPERLY POUNDED TOGETHER, THE POLE SECTIONS SHOULD HAVE A 2-1/2" MINIMUM OVERLAP, LEAVING 1-1/4" BETWEEN THE OVERLAPPING POLE AND THE IDENTIFICATION STICKER.



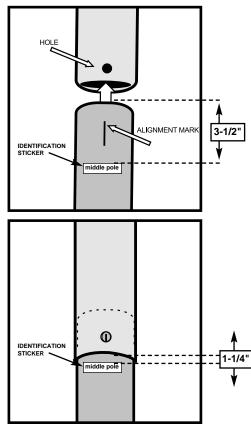


8

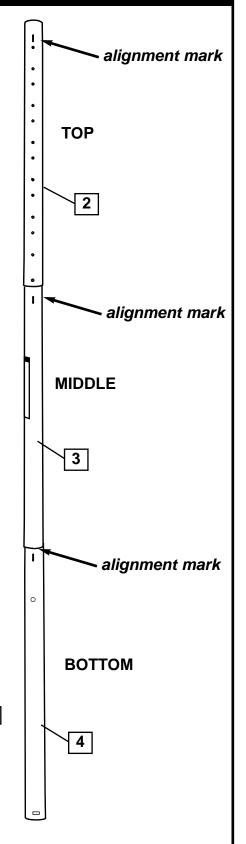


M580001 05/05

3.

Attach pole assembly to tank as shown. Secure pole assembly to tank by turning the pole assembly clockwise as shown.

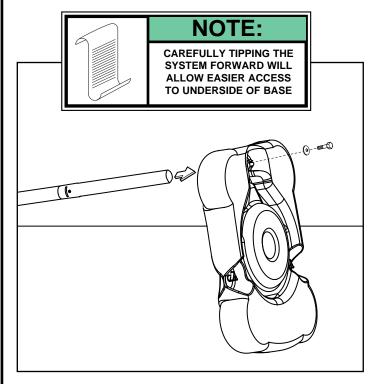


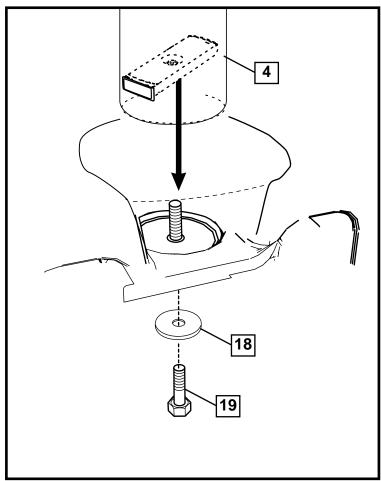




WARNING!

TWO PEOPLE REQUIRED FOR THIS PROCEDURE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

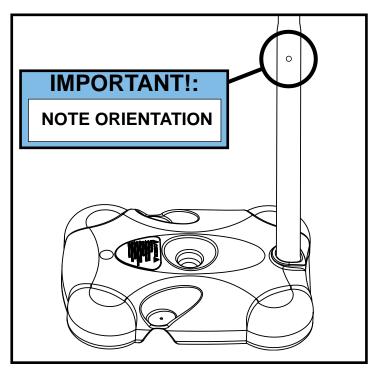

4.

Secure tank struts (21 & 22) to pole.

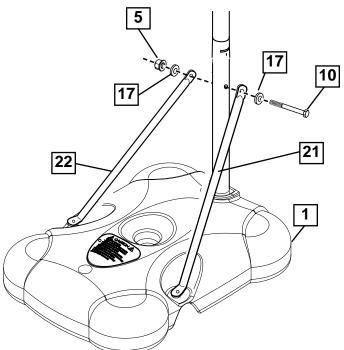





TIGHTEN BOLT (10) IN LOCK NUT (5) UNTIL FLUSH (EVEN) WITH LOCK NUT'S OUTER EDGE.


FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.


5.

Rotate struts down and bend struts outward to line up with holes on base as shown. Secure free ends of tank struts to tank with carriage bolt (8), and nut (20) as shown. Repeat for other side.

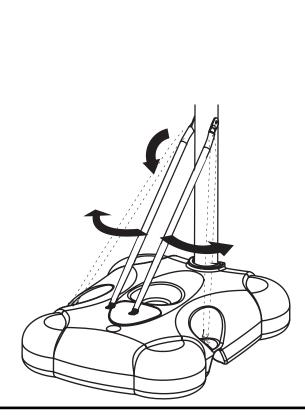


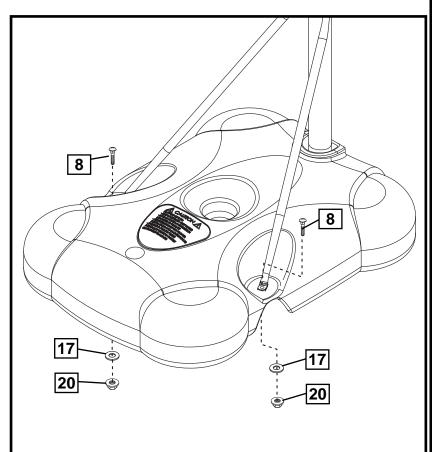

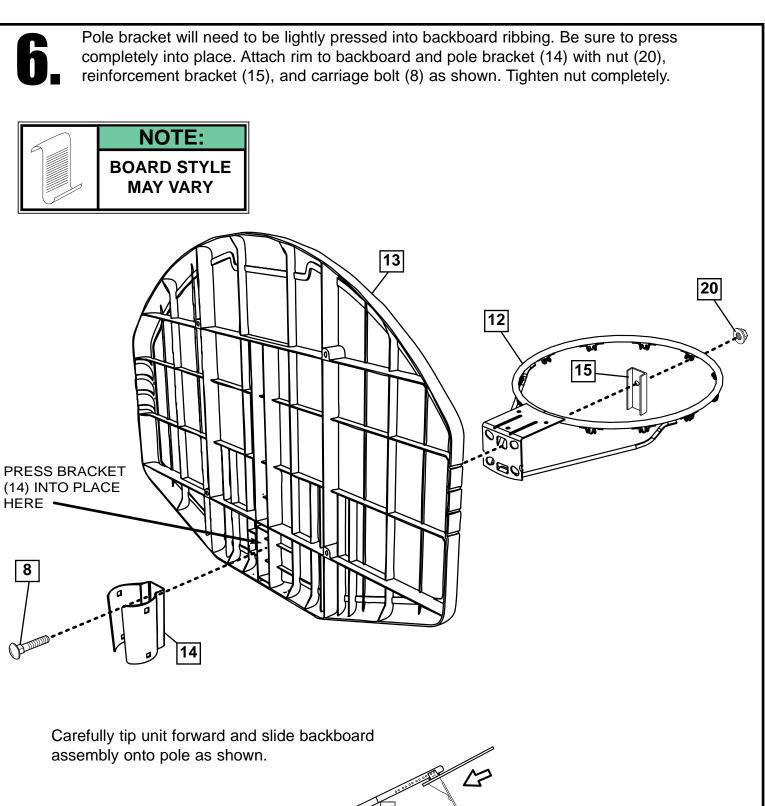

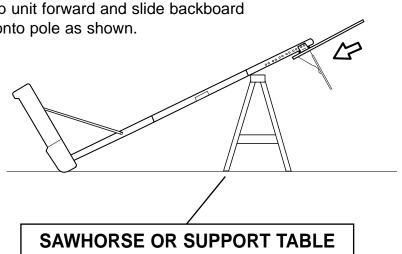

Attach board assembly to pole with carriage bolts (16) and knobs (11) as shown. Install pole cap (7) as shown.

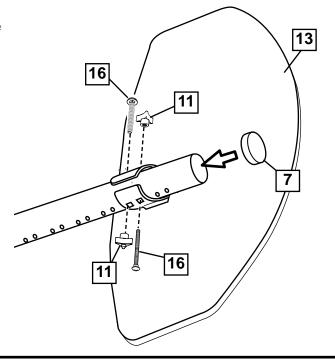

8.

Place assembled unit in desired location. Fill tank completely with water (14 gallons/53 liters) or sand (approx. 170 lb./77 kg) and snap tank cap (9) in place.




A CAUTION!


ADD ONE GALLON (3.78 LITERS) OF NON-TOXIC ANTIFREEZE IN SUBFREEZING CLIMATES.



NOTE:

IF USING SAND: 2 GALLONS OF ANTI-FREEZE IS NOT REQUIRED

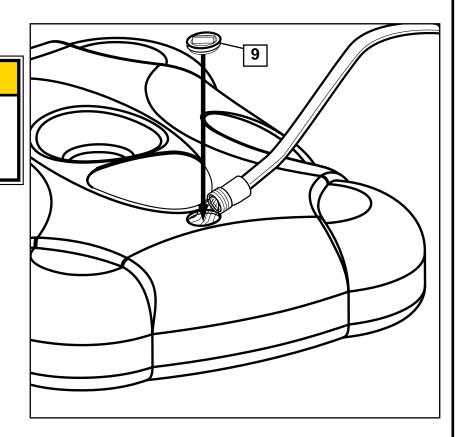

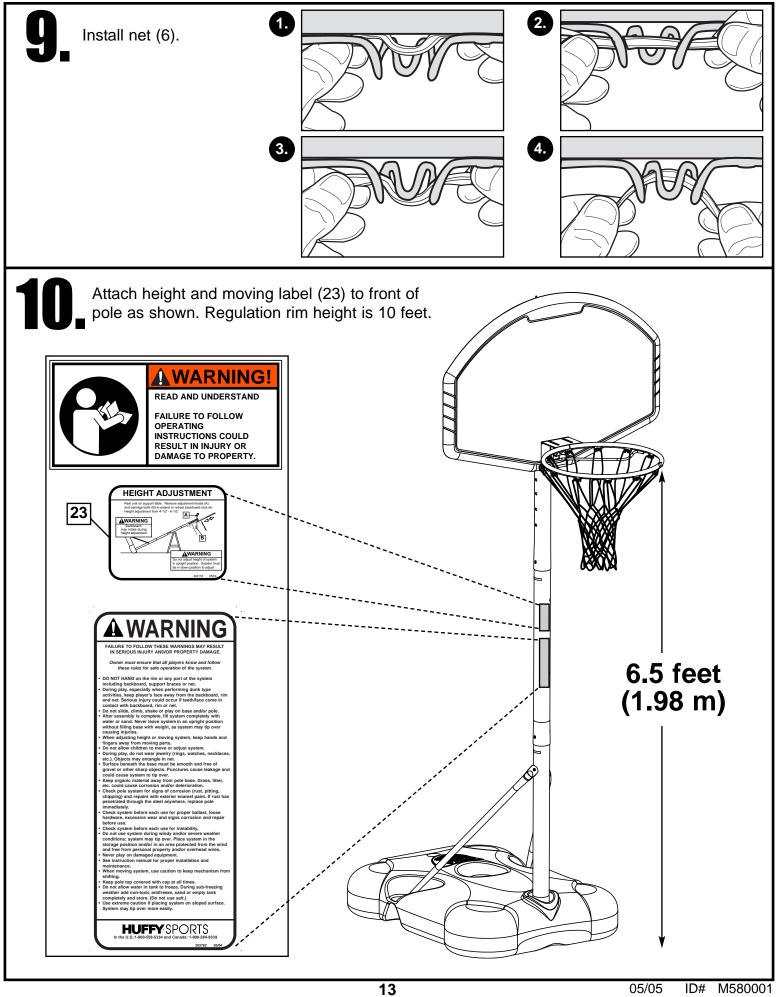




▲ CAUTION!

HEIGHT AND MOVING LABEL MUST NOT OBSTRUCT FACTORY ATTACHED WARNING LABEL.



▲WARNING!

DO NOT LEAVE ASSEMBLY UNATTENDED WHEN EMPTY; IT MAY TIP OVER.



ID# M580001 05/05